

# 1HOME CRESTRON HOME

## INTEGRATION DRIVER MANUAL

V26.07.20 - OS4.6




Crestron Home - a premium full feature smart home environment for luxury housing

[\(Crestron Home App Quick Start Guide\)](#)

To Install – Navigate here in Crestron CH Configurator

Device Types > Drivers > Platform > TIG > 1HOME

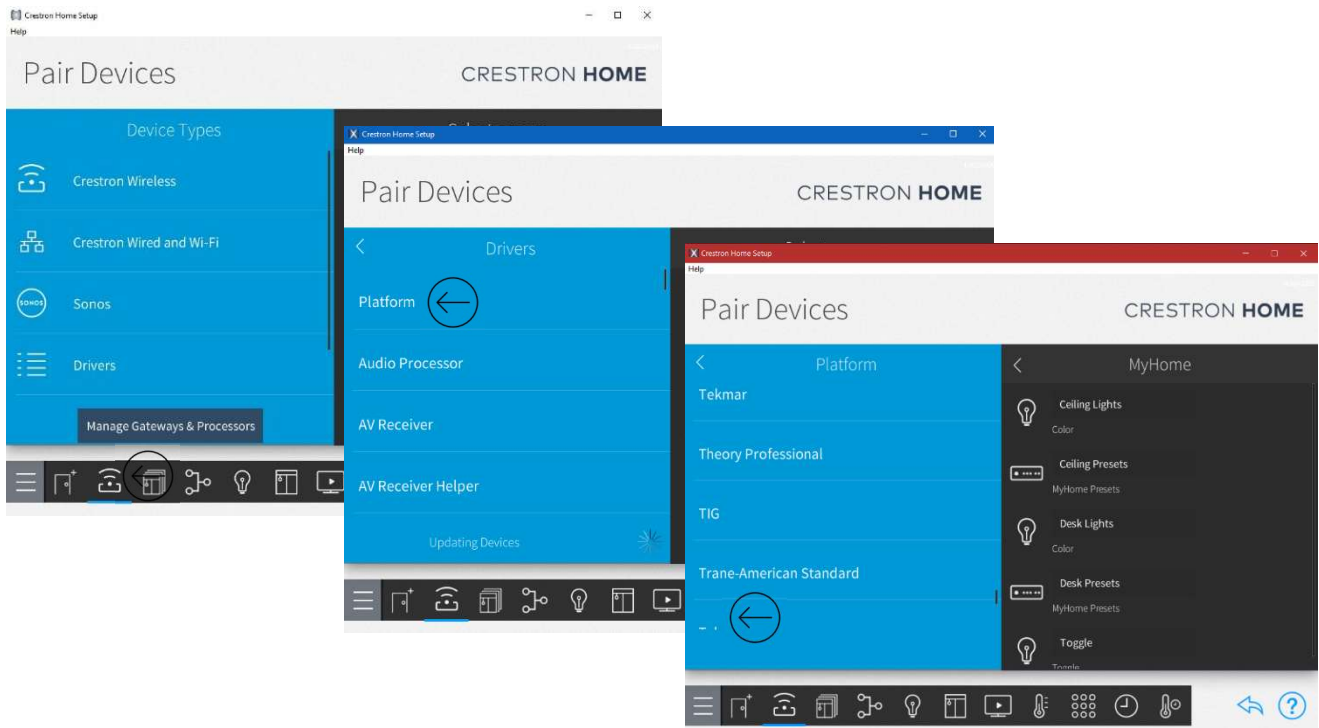

## Contents

|                                      |    |
|--------------------------------------|----|
| Hardware / Software / Firmware ..... | 3  |
| Config / Network.....                | 3  |
| NATIVE DEVICES.....                  | 5  |
| • lightonoff: .....                  | 5  |
| • socketonoff .....                  | 5  |
| • lightdim .....                     | 6  |
| • lighttct .....                     | 6  |
| • lightcolor .....                   | 7  |
| • doorlock .....                     | 8  |
| • garagedoor .....                   | 8  |
| CUSTOM DEVICES.....                  | 9  |
| • thermostat.....                    | 9  |
| • roomairconditioner .....           | 10 |
| • fan.....                           | 11 |
| • windowcovering .....               | 12 |
| • Containers.....                    | 14 |
| • Generic.....                       | 15 |
| • sensorcontact.....                 | 15 |
| • sensortemperature.....             | 15 |
| • sensorhumidity .....               | 16 |
| • sensorlight.....                   | 16 |
| • sensoroccupancy.....               | 16 |
| • pushbutton.....                    | 17 |
| • pulsetrigger.....                  | 17 |
| • scenetrigger .....                 | 17 |
| OS Notes .....                       | 18 |
| SUPPORT .....                        | 18 |

## What Can Be Done?

This driver enables enhanced control and monitoring of supported devices within the 1Home [KNX/Matter](#) ecosystem, leveraging the latest SDK capabilities from Crestron Home to provide a robust and sleek user-friendly experience using the Crestron Home App and OS4 connected Crestron / KNX and Matter devices.

[OS4.6](#) will be the [last supported version](#) for [Hardware Version 1](#) processors, please [upgrade](#) to [version 2](#) processors for all updates and future device [support after OS4.6](#).

All devices are built on driver framework V2 (Entity model, please refer to the release notes for all newly support features) – Device support extends only as far as the native SDKs publicly released by Crestron Home. Since native SDKs for Shades and Thermostats have not yet been released, custom implementations have been developed on this platform to enable integration.

## Hardware / Software / Firmware

---

[Crestron Home 4 Series Processors](#): RESIDENTIAL PROCESSORS ONLY

[HW](#): [DIN-AP4-R](#) / [MC4-R](#) / [CP4-R](#) / [PC4-R](#)

[HW](#): [CP4-R V1](#) processors support [up to OS4.6](#)

[HW](#): [CP4-R V2](#) processors for all updates [after OS4.6+](#)

[SW](#): Access to Crestron Home Configurator

[SW](#): Access to 1Home Server Dashboard

[SW](#): Access to Crestron Home Mobile App

[FW](#): CONTACT 1HOME FOR PRODUCT PURCHASE WITH LATEST FIRMWARE

[FW](#): Email -- [support@1home.io](mailto:support@1home.io)

## Config / Network

---

Ensure that [port 80](#) is accessible from the Processor to facilitate necessary standard communications, so in case the port communications between 1Home and Crestron changes, please contact 1Home and ensure the port configuration is correct if not connected. [Callback ports](#) for [3000](#), upwards, [3001](#), [3002](#) to [3010](#) should not be utilized by other servers on the network, in the callback communication is interrupted, please reach out to support or allow the CH Processor priority to listen on the network for these ports.

## CONFIGURING 1HOME CRESTRON HOME INTEGRATION DRIVER EXTENSION

Upon installing the driver, you will be prompted to enter the IP address of the 1HOME Server. Valid inputs should be within the IP range, such as "192.168.10.2", The Port is default 80, and further an App Token from 1Home would need to be pasted into CH in the Password field, Username can be left blank or Left with startup text.

1HOME

Devices

**Integrations**

Automations

Remote Access

Mobile App BETA

System

**Crestron Home**

Connect your 1Home devices (e.g. KNX) to Crestron Home and use the Crestron Home app to control them.

**Configure**

Please enter TCP/IP settings:

| TCP/IP settings     | Value                                         |
|---------------------|-----------------------------------------------|
| IP Address of 1Home | 192.168.10.2                                  |
| IP Port             | 80                                            |
| User Name           | This is Blank, Below Password is your API Key |
| Password            | *****                                         |

Requires Authentication: ☒

**Crestron Home Settings** [Help](#)

**Password**  
Copy this password and paste it into your Crestron Home configuration tool to connect your Crestron Home with 1Home. Copy it to 'Password' field and leave the 'User Name' empty.

cec649b7-821f-4dc5-92d4-b238a8ff1be4

**Revoke**

Current Callback URL: <http://192.168.10.14:3001/callback/>

Latest Connection Since: Jul 22, 2025, 10:43:12 PM

Driver Version: 25.08.06

Pair Devices

CRESTRON HOME

Device Types

Crestron Wireless

Crestron Wired and Wi-Fi

Sonos

Managed Platforms

Manage Gateways & Processors

1Home

1Home

Crestron 1Home

All Lights

[knx] - All lights

All Shutters

windowcovering [knx] - All shutters

All TH

thermostat [knx] - All thermostats

DM

1 Home Hubset Controller

After the Driver has been added, Navigate to **Managed Platforms**, where you will find all **Imported** devices created in 1Home on CH

Pair Devices

CRESTRON HOME

1Home

All shutters

General

Dining Room Light Sensor

Dining Room

KNX Scene 1

Default

Non-essential sockets

General

Dining Room

Ambient Light

[knx] - Dining Room Ambient Light

Color Light

[knx] - Dining Room Color Light

Dim Light

[knx] - Dining Room Dim Light

Main Light

[knx] - Dining Room Main Light


Occ

[knx] - Dining Room Occ


Devices can further be added here to each Room; devices will show with **icons per device type** with the room name and type identifier.

## NATIVE DEVICES


- [lightonoff](#): Supports on/off functionality in Home OS, Scenes, Actions, Events.
- Provides basic control to turn lights on or off.
- Ideal for simple lighting systems, scenes and automation actions and events.




ACTIONS:

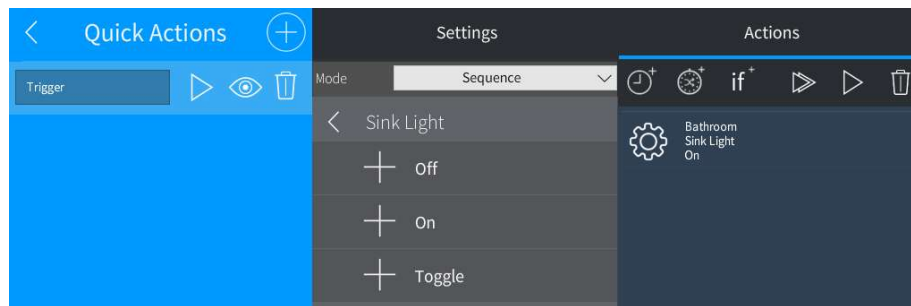


EVENTS:




- [socketonoff](#): On/off control for sockets in Home OS, Scenes, Actions, Events.
- Enables on/off control for connected electrical devices.
- Suitable for managing power outlets and simple electrical devices.




ACTIONS:

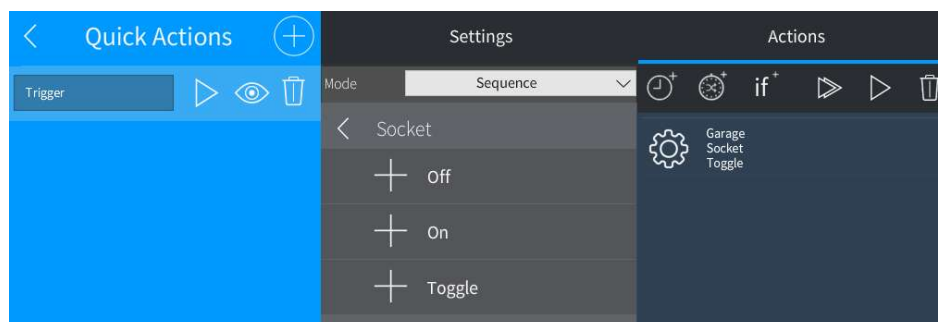


EVENTS:




- **lightdim**: Allows dimming control in Home OS, Scenes, Actions, Events.
- Allows for dimming control to adjust the brightness of lights.
- Does not support Transition Time from within Crestron Home, dimming can only be done on KNX. This means that all transition values in CH will not affect the dimming time, as it is managed ONLY by KNX

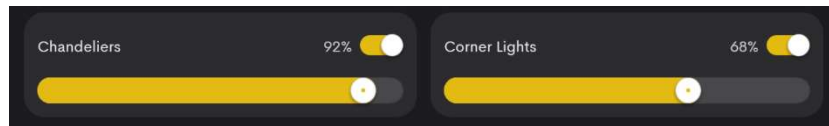

ACTIONS:

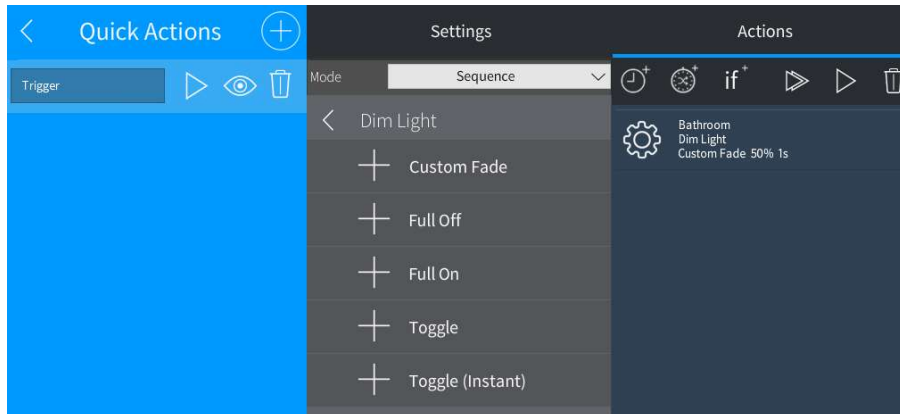


EVENTS:




- **lightct**: Supports color temperature control in Home OS, Scenes, Actions, Events.
- Supports adjusting the color temperature of lights, ranging from warm to cool tones.
- Enables fine-tuning of ambiance using Kelvin temperature scales.




ACTIONS:

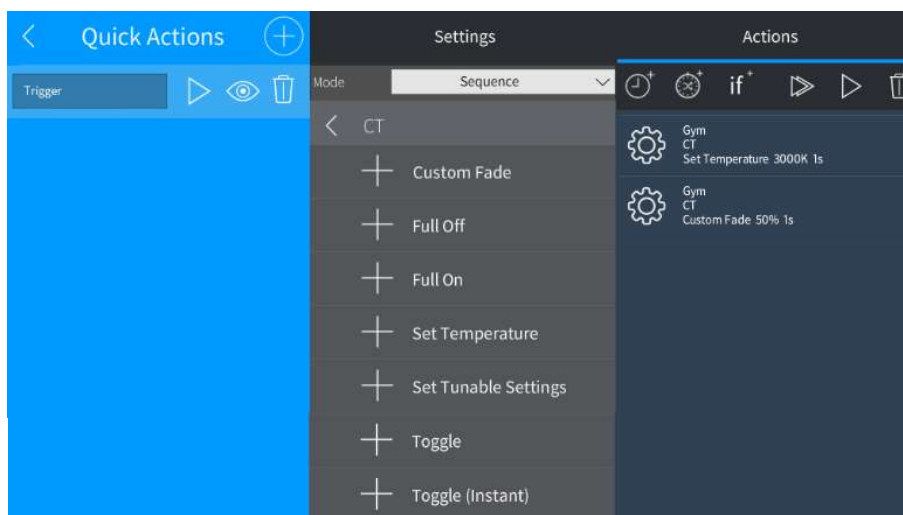


EVENTS:

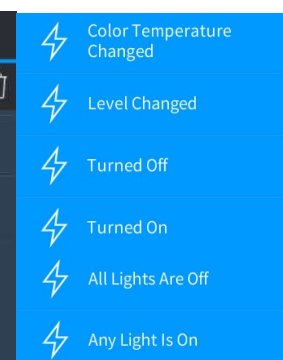


- **lightcolor**: Supports full-color control in Home OS, Scenes, Actions, Events.
- Offers full RGB color control for lighting, enabling custom color settings.
- Also supports brightness and color temperature adjustments for a comprehensive lighting experience.

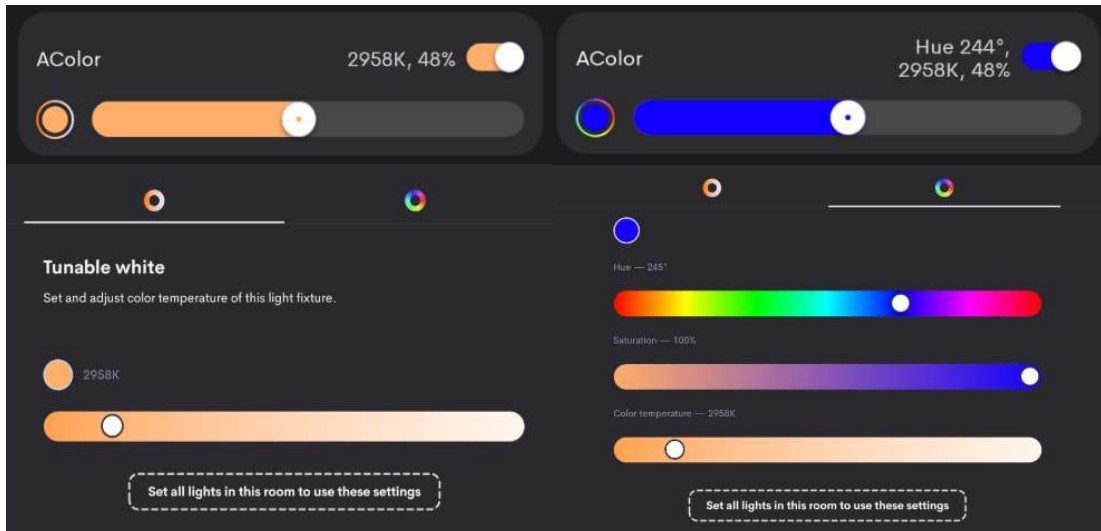

#### ACTIONS:

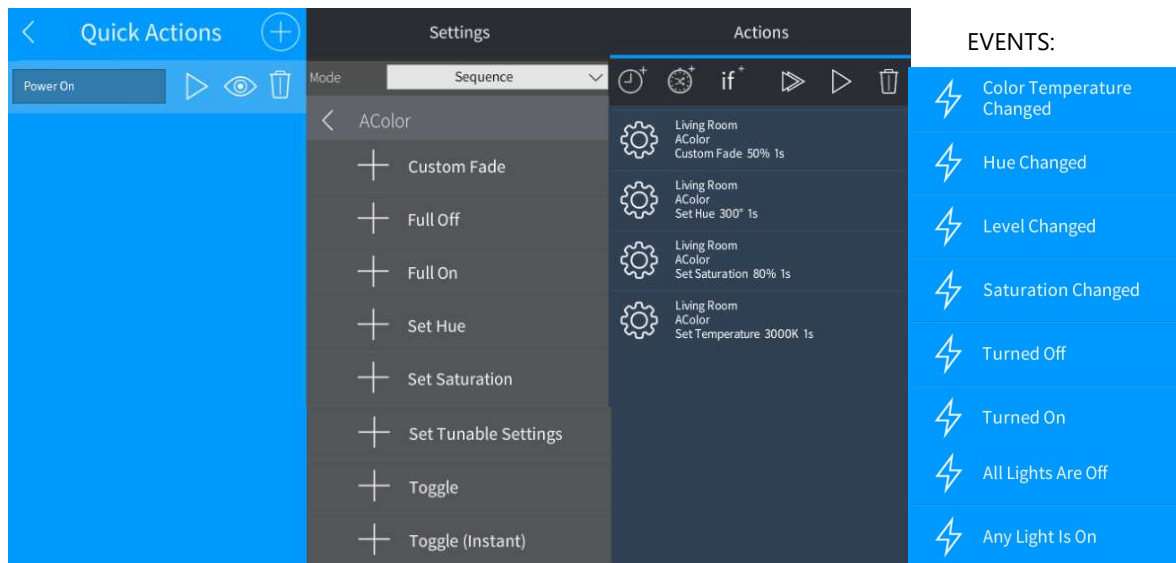


- [doorlock](#): Lock/unlock functionality in Home OS, Actions, Event.
- Provides functionality to lock or unlock doors.
- Supports secure access and status monitoring.

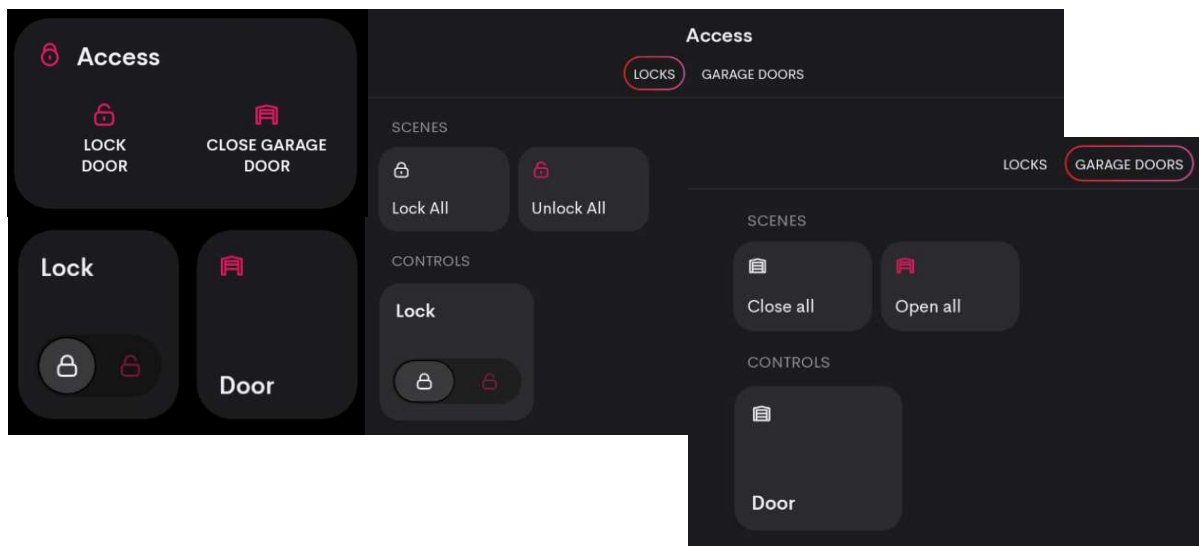

- [garagedoor](#): Open/Close functionality in Home OS, Actions, Event.
- Provides control for opening and closing garage doors.
- Includes status monitoring to ensure safety and proper operation.


#### ACTIONS:

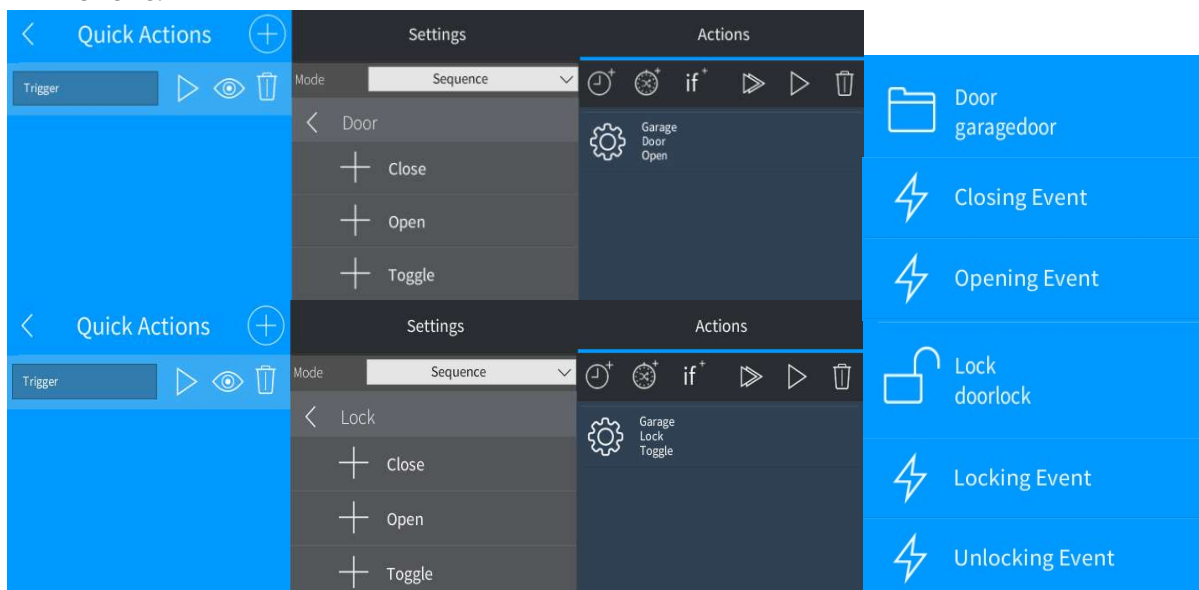




## CUSTOM DEVICES

- **thermostat**: Manage heating and cooling setpoints, system modes (Actions, Events).
- Manages heating and cooling setpoints, mode states and HVAC operation modes.
- (Events for Thermostat and Aircon will populate dynamically according to the configuration done on 1Home)
- Supports modes such as auto, heat, and cool, and HVAC Modes for fine control over room temperature.

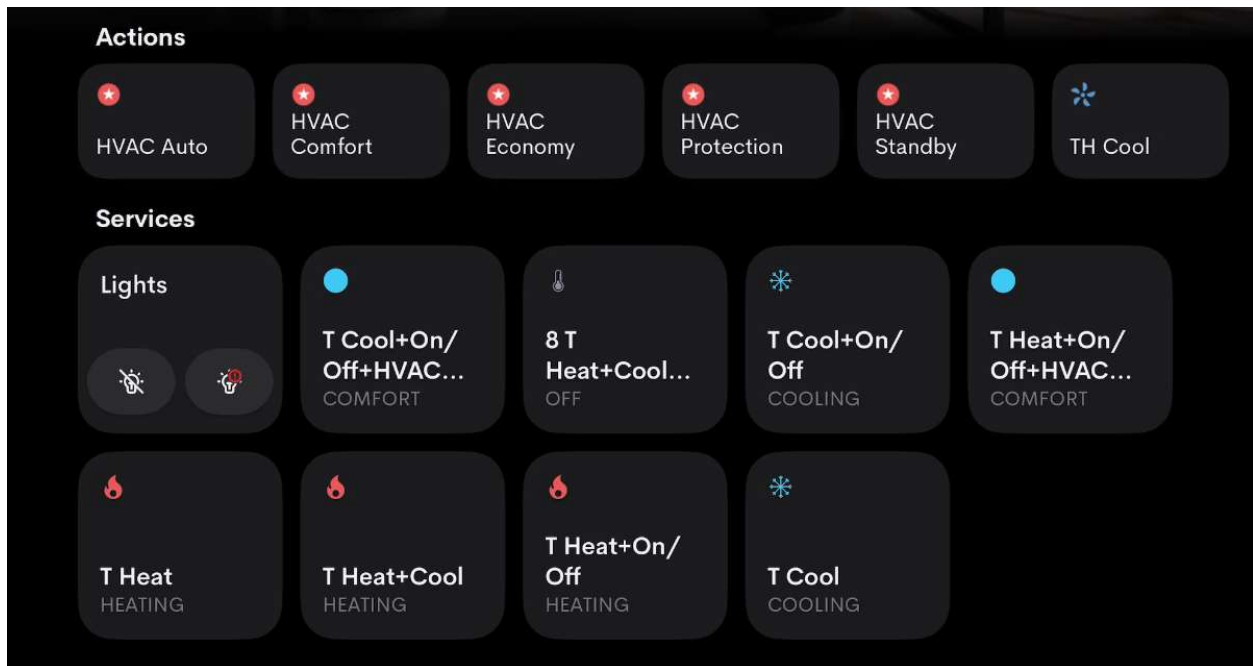


### ACTIONS:

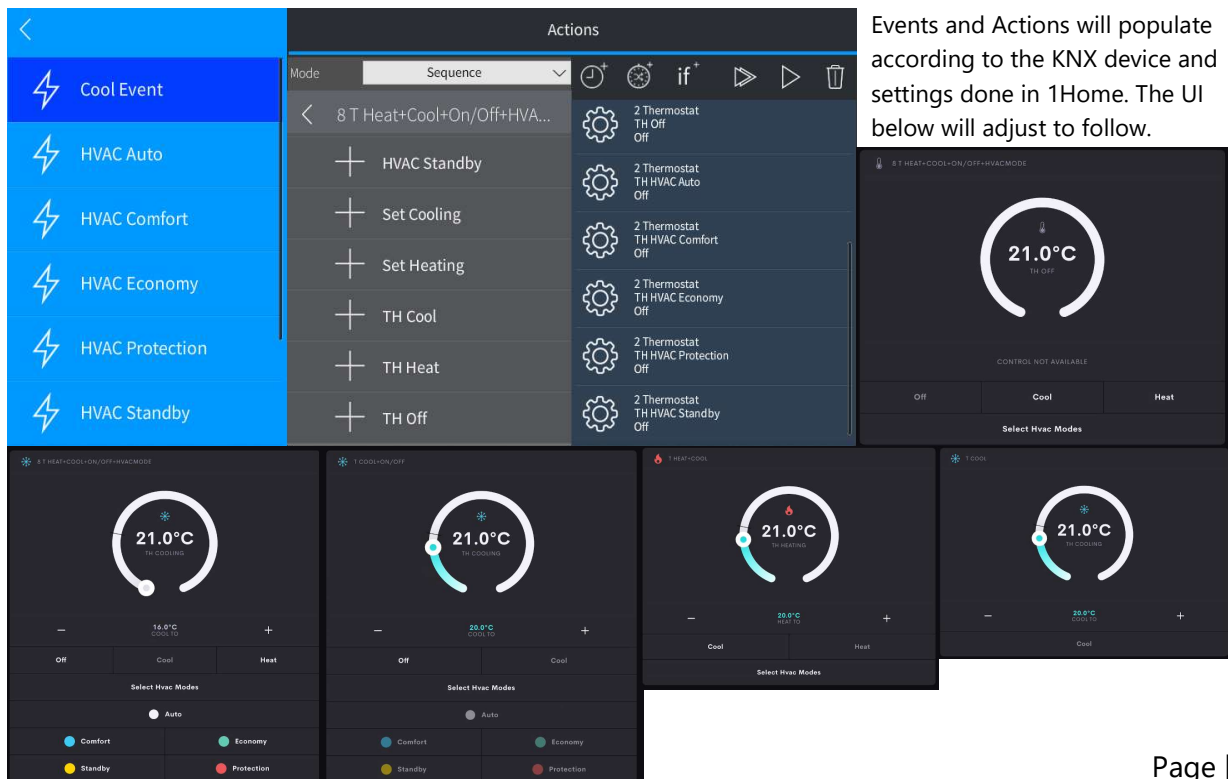


Events and Actions will populate according to the KNX device and settings done in 1Home. The UI below will adjust to follow.


- roomairconditioner: Control fan and temperature settings (Actions, Events).
- Controls air conditioning units, including fan speed and operational modes (cool, heat, fan, dry).
- Provides real-time monitoring and adjustments for comfort.

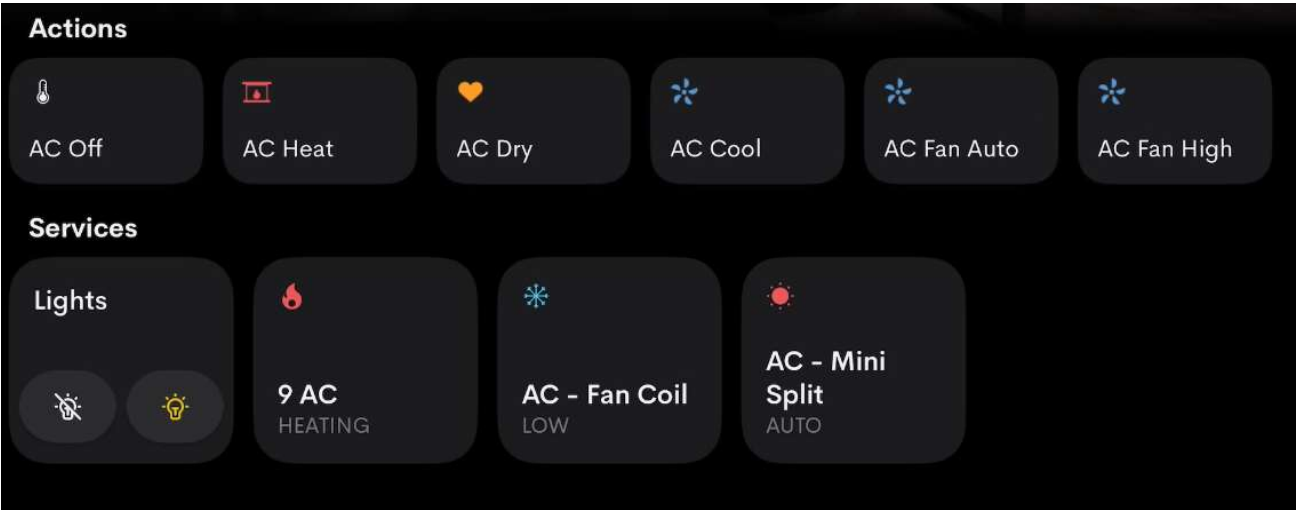


ACTIONS:

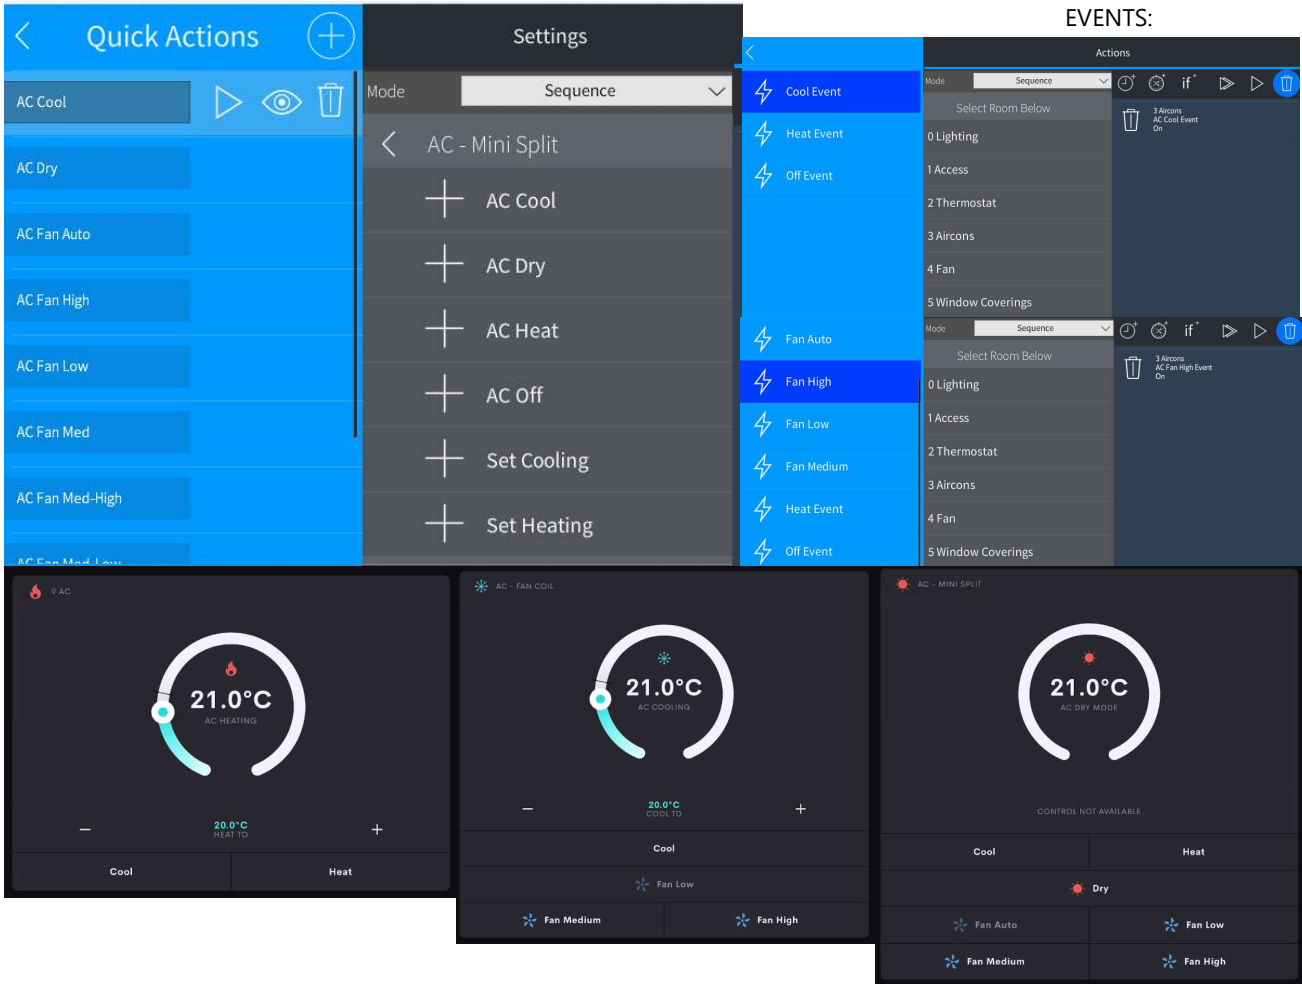

- fan: Control dedicated Fan Devices (Scenes, Actions, Events)

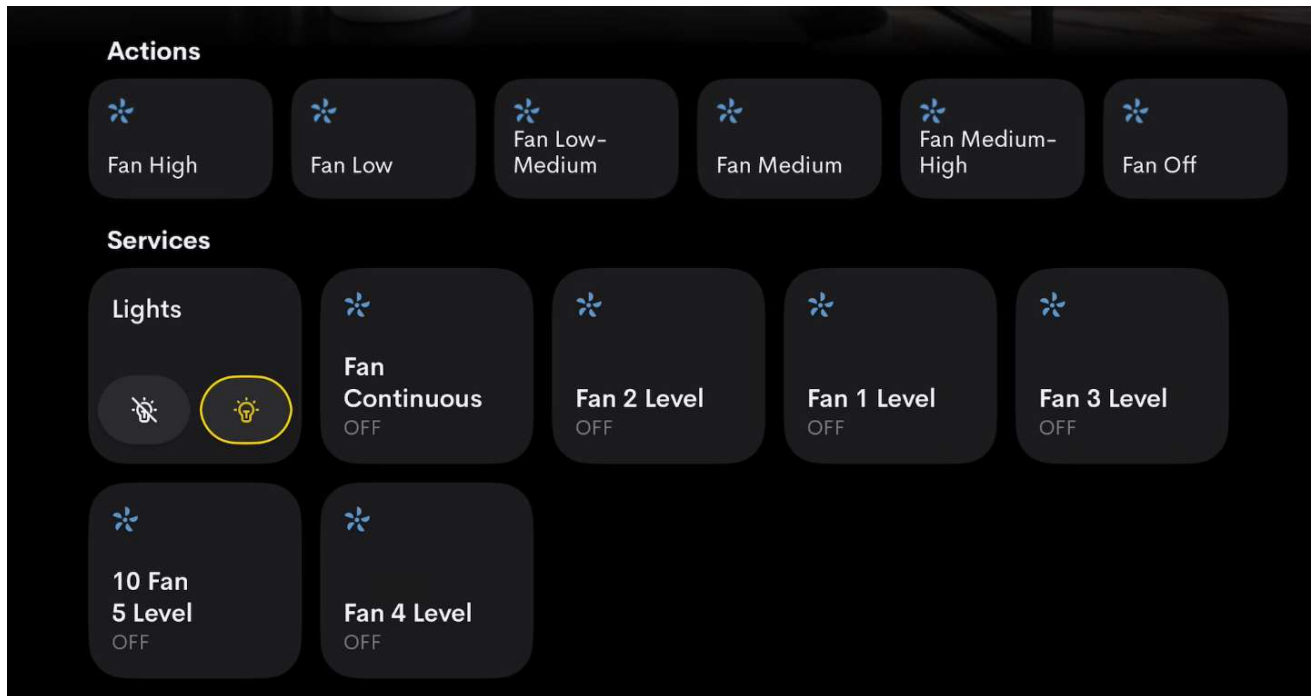


ACTIONS:

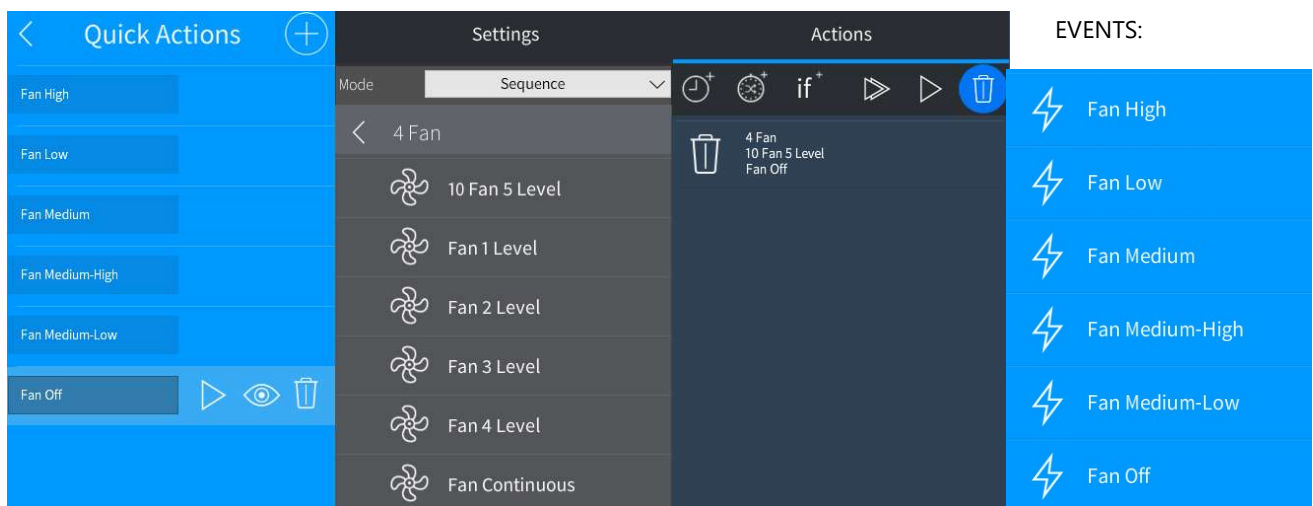

Each Fan stage will have actions and events populate dynamically according to the 1Home Settings and KNX Supports.

- [windowcovering:](#)
- Enables opening, closing, and tilt control for Shutters and Jalousie Devices

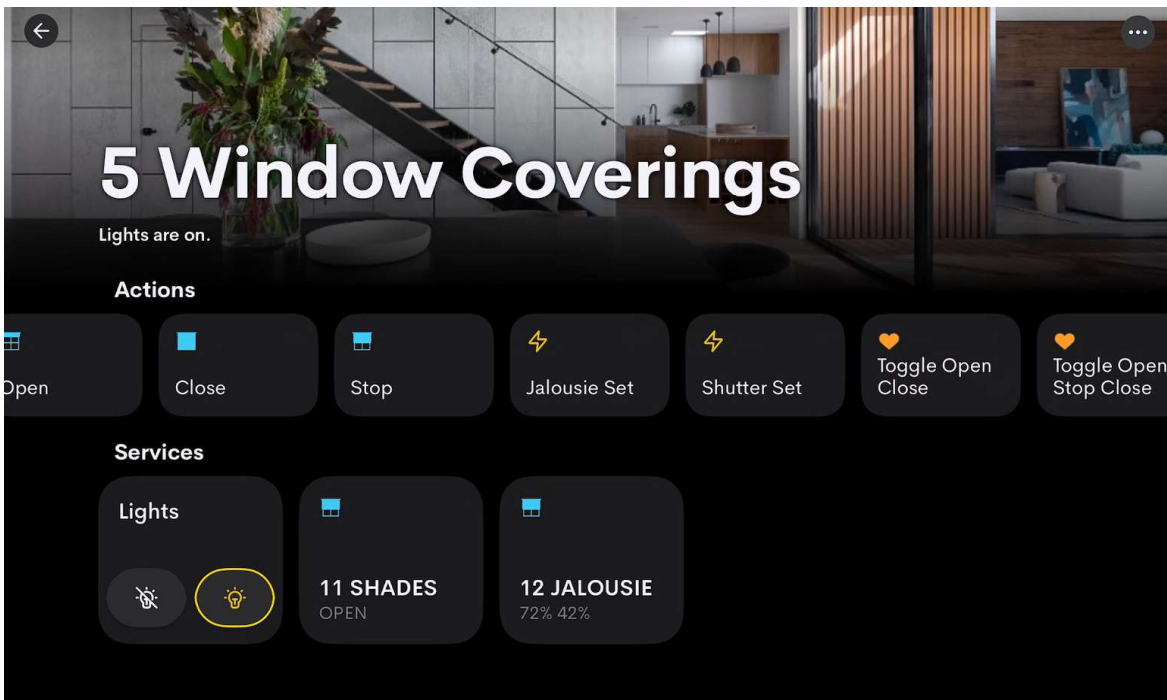

#### 11 SHADES Settings

About **Installer Settings** Advanced

|  |                                                         |                                     |
|--|---------------------------------------------------------|-------------------------------------|
|  | Visibility In Room<br>Enable to show Tile in Room       | <input checked="" type="checkbox"/> |
|  | Visibility in Home<br>Enable to show Tile on Home Page  | <input type="checkbox"/>            |
|  | Advanced Shades Mode<br>Enable advanced mode for Shades | <input checked="" type="checkbox"/> |


#### 12 JALOUSIE Settings

About **Installer Settings** Advanced


|  |                                                         |                                     |
|--|---------------------------------------------------------|-------------------------------------|
|  | Visibility In Room<br>Enable to show Tile in Room       | <input checked="" type="checkbox"/> |
|  | Visibility in Home<br>Enable to show Tile on Home Page  | <input type="checkbox"/>            |
|  | Advanced Shades Mode<br>Enable advanced mode for Shades | <input checked="" type="checkbox"/> |

Visibility In Room or In Home can be set for each using the Installer Settings Section.


SHUTTER ADVANCED MODE: vs Basic Mode will layout the buttons for the device differently.

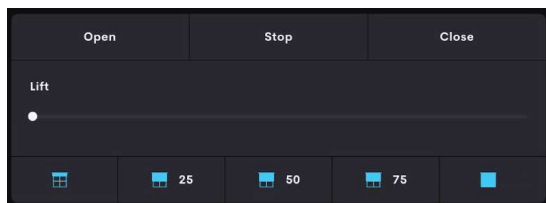


SHUTTERS BASIC LAYOUT:

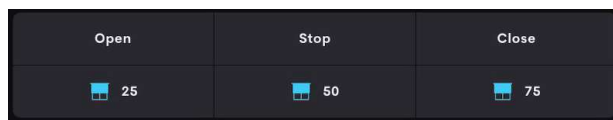


JALOUSIE ADVANCED MODE:

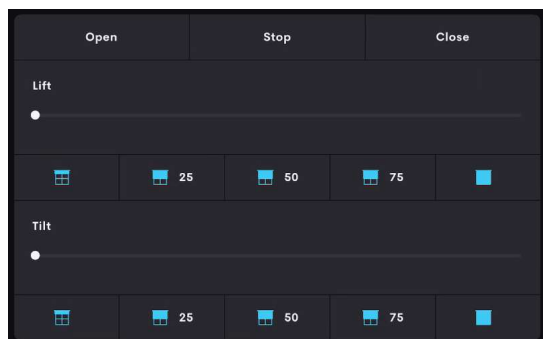


JALOUSIE BASIC MODE:

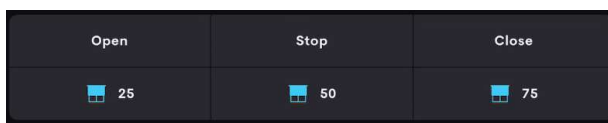

## ACTIONS:

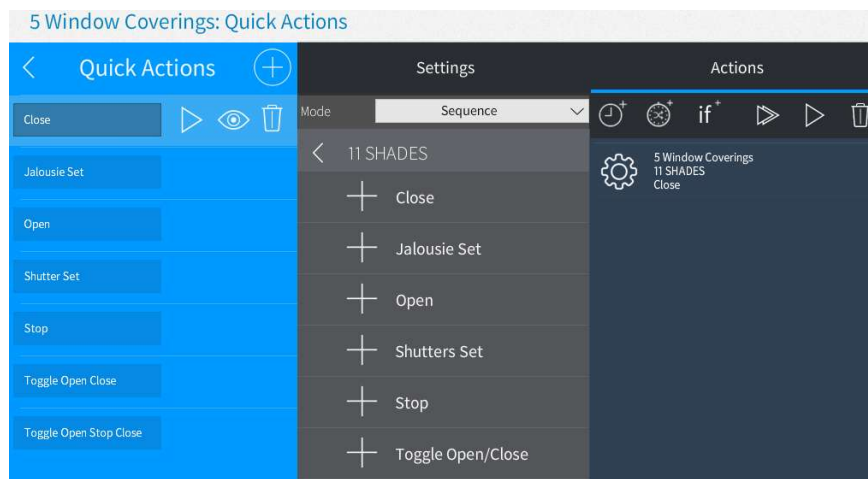

Use for Keypad Trigger



Shutters Support Lift Set

Jalousie Support Tilt Set

Set target lift or tilt for each below using integer 0 - 100



setpoint

72



setpoint


42


## EVENTS: LIFT



Jalousie will show events where Lift is supported, In addition to this,  
If Tilt is supported the next set of Event will be visible as seen below.

## EVENTS: TILT

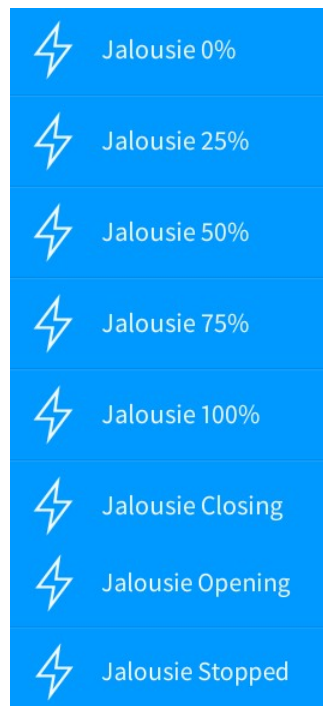

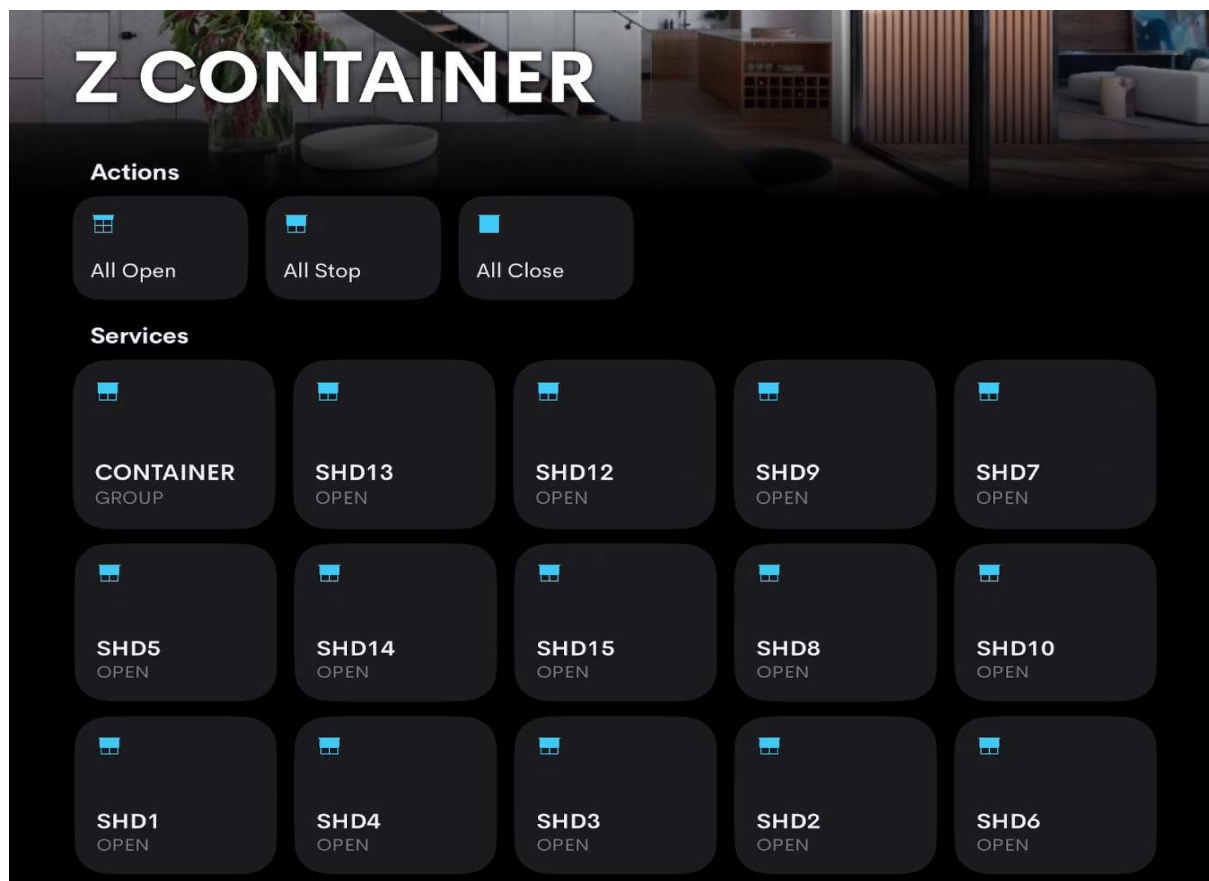

Container Level (0 to 30) Level 0 = Is generic non-contained and Default Level 1 to 30 can be assigned to individual containers.

*Container Level*

Alpha V1.0.0 Set the container level for Shades (0-30)

*Container Order*


Alpha V1.0.0 Set the Order for Shades in containers

In this example all Shades 1 to 15 have been assigned to a single container. Once a device assigns, the container will be available in managed platforms [Managed Platforms](#)


Order can then be applied per shades device, to move devices up and down the container, assigned order is from 1 to 30, 0 by default will be un-ordered 1 will be top, 30 bottom. Example SHD1 = 1 and SHD12 = 12

*Container Order*

Alpha V1.0.0 Set the Order for Shades in containers

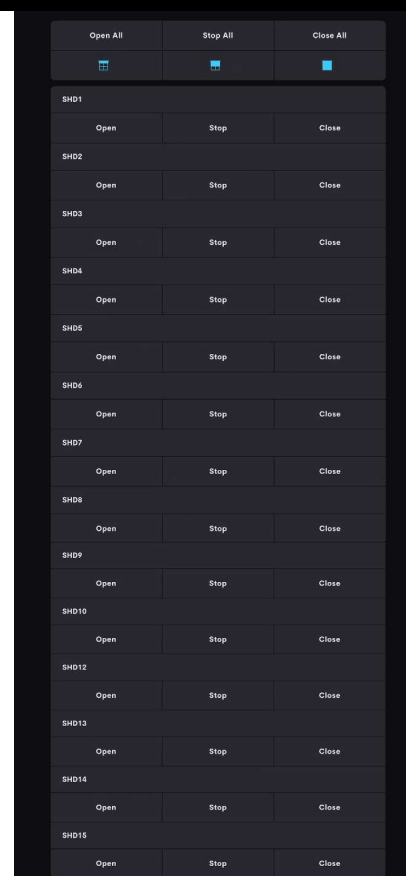


Top Level commands can be used to control all shades in the container using one button.

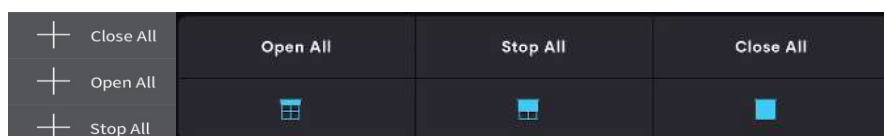




- [Generic](#): Display custom data (UI Only)

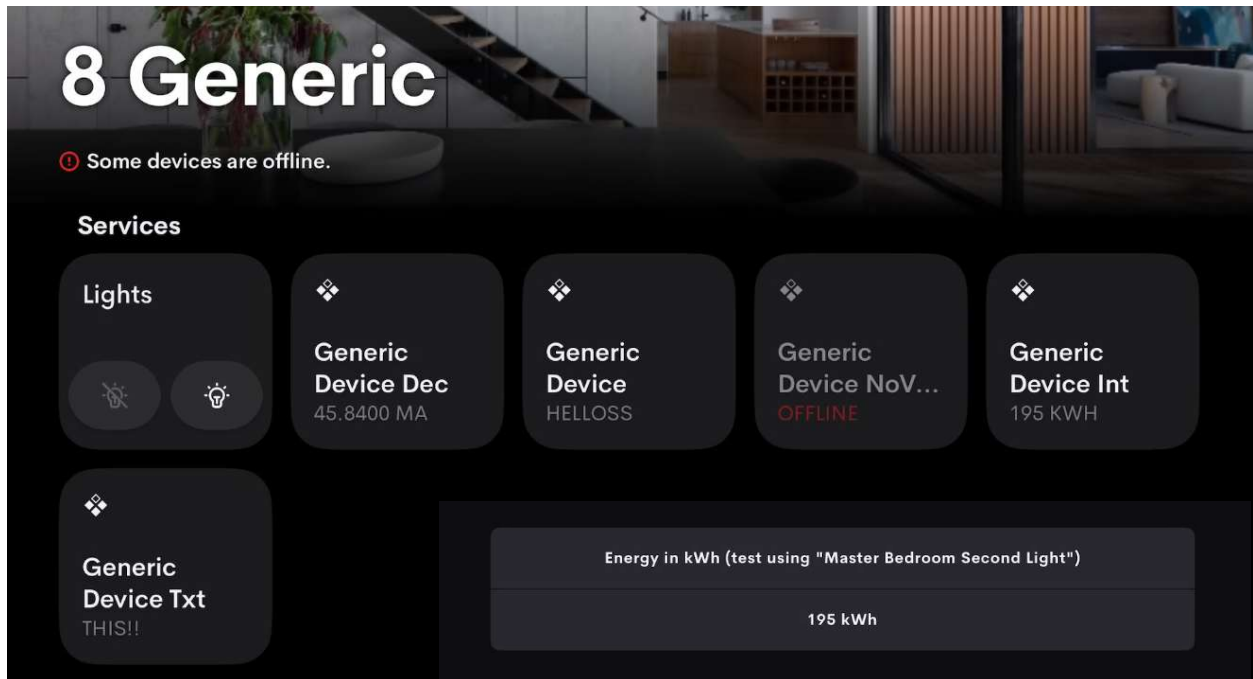

- [sensorcontact](#): Contact sensors (e.g., doors, windows) (Events)
- Detects the opening and closing state of doors, windows, or other contact points.
- Useful for security and automation triggers.

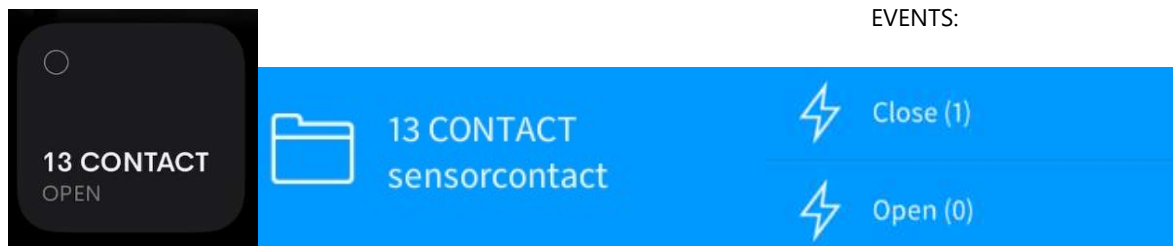


- [sensortemperature](#): Temperature sensors (Events)
- Monitors ambient temperature.
- Often integrated into HVAC systems or standalone for monitoring purposes.



- [sensorhumidity](#): Humidity sensors (Events)
- Tracks humidity levels in the environment.
- Useful for climate control and air quality monitoring.

#### EVENTS:

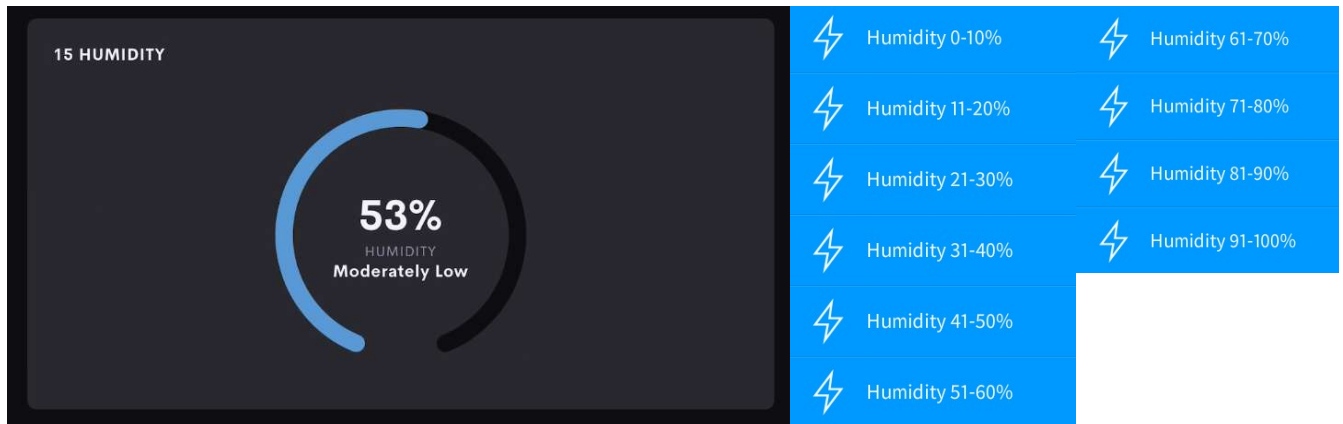


- [sensorlight](#): Ambient light sensors (Events)
- Measures ambient light levels - Automation based on lighting conditions using Lux measurements.

#### EVENTS:




- [sensoroccupancy](#): Occupancy detection (Events)
- Detects motion or presence in a room.
- Useful for security systems and energy-saving automation.

#### EVENTS:

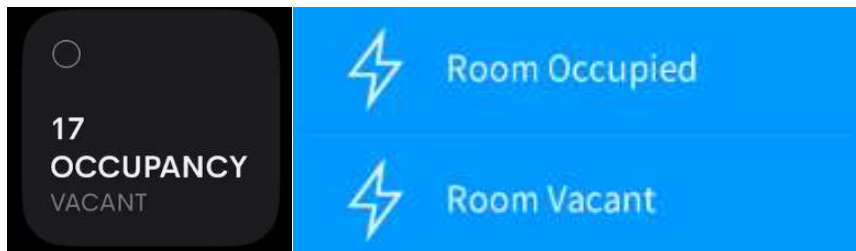





- **pushbutton**: Generic push-button support (Events Only).
- Provides functionality for manual triggers through virtual buttons. (One Way – 1Home to Crestron)
- **This driver does not natively support KNX Keypads to function as a pushbutton device**
  - KNX Keypads are required to be programmed outside the scope of Crestron, if included using Pushbuttons, feedback status and device functionality will be limited by momentary pulse events only and buttons will not include LED backlight feedback states and states inside CH.

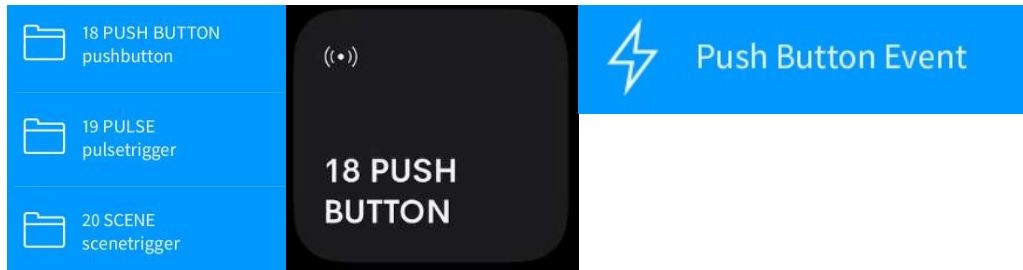

- **pulsetrigger**: Trigger for specific events (Actions, Events).
- Used to trigger specific events or actions.
- Ideal for momentary actions or temporary states.

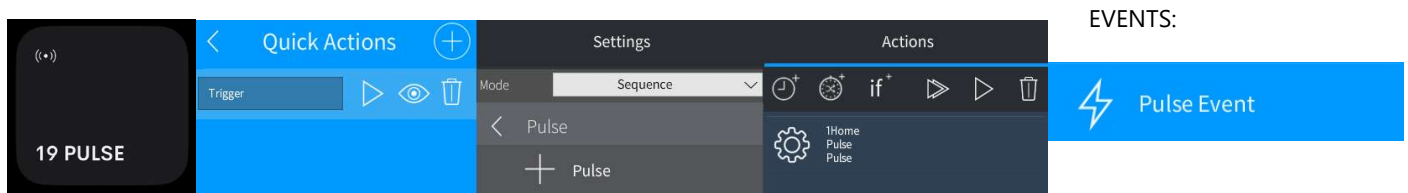

- **scenetrigger**: Scene management and activation (Actions Only).
- Enables activation of predefined scenes or automation routines.
- Useful for quickly setting multiple devices to a desired state.

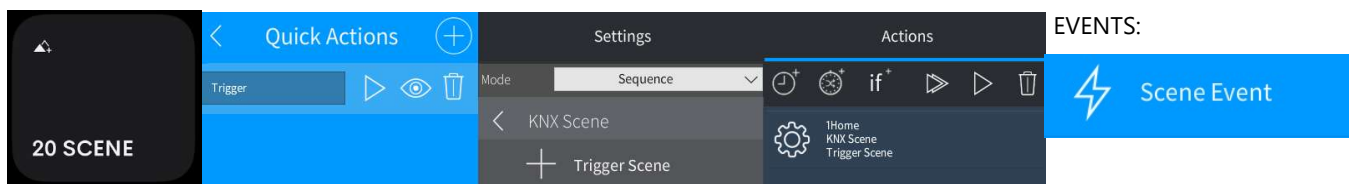

# OS Notes

Tested on SDK V26.0000.0025

Tested on Driver Version: V25.12.15

Tested on 1HOME FW: V5.0.1

Tested on OS Version: OS4.007.0243


## SUPPORT

Please email support with a detailed explanation of the issue, add as much detail as possible when describing the issue, with screenshots, per device and per functionality used on the device when the issue occurs, the information can be sent to either the support groups.

1. [support@1home.io](mailto:support@1home.io) (For KNX Support and Driver Support)
2. [driversupport@tig.eu](mailto:driversupport@tig.eu) (For internal driver support Crestron Home (DIN-KXI / CI-KNX))

### IMPORTANT

- 1- All upgrades made from older versions to 25.08.06 will require a processor reboot to finalize the upgrade – in addition to this, configured HVAC modes and Shades / Containers will require manual upgrade input – if settings are not visible press the reconfigure button to reload the device to show additional options, this is only required once after the upgrade.

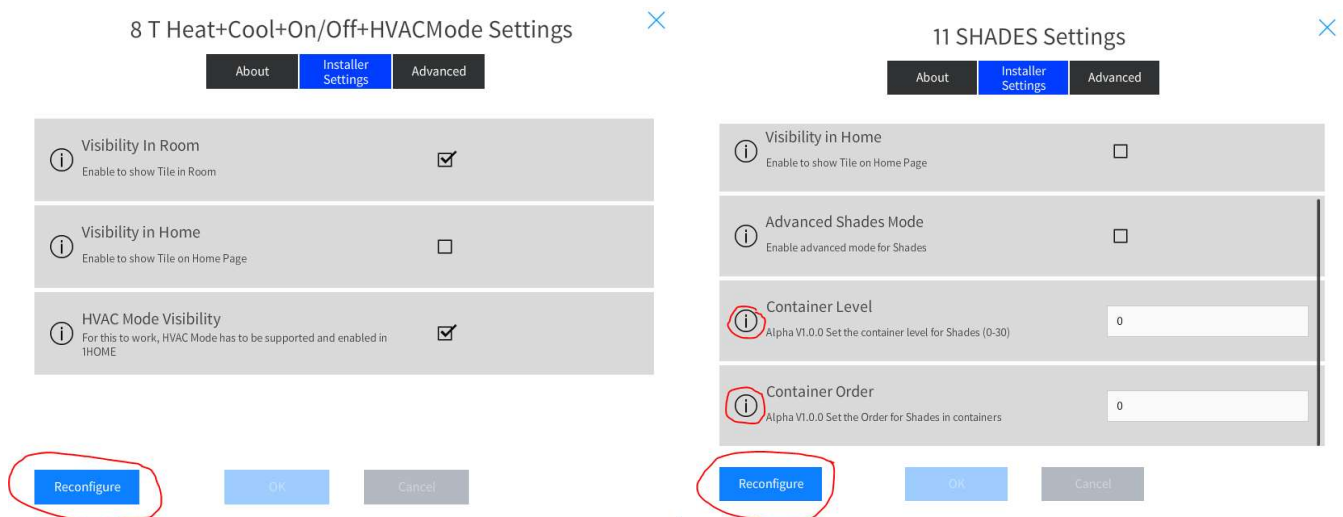

- 2- This driver does not have native support for KNX Keypads – KNX “Pushbuttons” are required to be programmed outside the scope of Crestron, if included using Pushbuttons, feedback status and device functionality will be limited by momentary pulse only and buttons will not include LED backlight feedback states and states inside CH.

## 25.03.10

Version: Platform Driver V25.03.10 - 1Home Firmware v3.2.1

- Multi Instance Multi Driver fix, allowing more than one Driver to be loaded for cases multiple 1Home servers would be connected to a single processor, Callback ports will auto increment with required instances allocation per added driver.
- AC Fan speed slider visibility fixes and attributes remapping.
- Auto device discovery and auto rename device

## 25.04.02

Version: Platform Driver V25.04.02 - 1Home Firmware v3.2.1

- Auto Deletion fix, Devices will now add and remove in complete.
- Startup time for online 70% faster.
- Visibility for Home and Room added for each device
- Added enqueue updates for startup performance on larger devices
- Open, Close and Stop support for Shades devices
- Advance and Basic layout support for Shades

## 25.04.20

Version: Platform Driver V25.04.20 - 1Home Firmware v3.2.1

- All Native lighting updates to combat edge cases for KNX 0 / 100% value scenarios
- HVAC Modes show and Hide functionality
- Lighting Update for Edge case with Scenes
- Container Update for Reboot States
- Shading Update for Tile Percentage States

## 25.08.06 – OS4.6

Version: Platform Driver V25.08.06 - 1Home Firmware v4.1.1

- **New:** AC SupportedFanMode and FanMode new to reflect on UI and added as additional device.
- AC and TH FanPercent has been deprecated.
- **New:** AC and TH CurrentlyAvailableSystemModes supports edge case and matter scenarios
- **New:** Generic Device added to support custom readings and UI visual states
- **New:** Fan Device added to support fan controls from 1Home KNX
- Native lighting Actuator feedback support – in some cases actuators reports values after a delay causing sliders to jump and lighting to flicker, all values are now listed for update after a few seconds to combat erratic feedback behaviour and removes flickering.
- Curtains / Shades now send commands in explicit, adding support to keypad integration.
- Shades containers updated from Beta to Alpha, adding order support and dedicated regeneration “Please note upon update you will need to re-add containers from Managed platform, as the container will appear offline”
- Hot Swappable and Disposal Support (“Please note drivers will not automatically go online after this upgrade, a CH reboot will be required for all states to sync and devices to reload, this adds functionality to all future updates, which allows hot swapping and disposal”)
- Driver database “Faster online states and driver sync time, Estimated time 1Min/100 Devices”
- Crestron Home - Matter Device Support for 1HOME SERVER PRO
- Quality Enhancements on Device Feedback and Response in case of actuator delays.
- **New:** Door lock entity updates to allow for device sounds and notifications settings.
- PlatformManagedDevice SDK Framework upgrade for structure, rename, add, remove and model support for faster deployment.

## 25.12.15 – OS4.6

Version: Platform Driver V25.12.15 - 1Home Firmware v5.0.1

- **New:** Lighting devices such as Dimmers – now follow attributes to “Switch On Percent Behavior” either as Fixed Value or Previous Value (This setting can be done on the 1Home Server under the Advanced page)
- Addressed and RGB Lighting edge case which was present in an isolated Brand and did not have the Switched-on Percentage Value settings.

## 26.02.11 – OS4.6

Version: Platform Driver V26.02.11 - 1Home Firmware v5.0.1

- **Updated:** Lighting devices such as Dimmers – now follow attributes to always send using value percentage – 1Home to manage further logic to KNX.
- HVAC Edge case Fix for Cooling and Heating during switch over from KNX
- Pushbutton device to include additional settings for visibility **"If not shown Remove and Re-add pushbutton devices, press reconfigure or do a processor reboot"**

## 26.06.06 – OS4.6

Version: Platform Driver V26.06.01 - 1Home Firmware v5.0.1

- HVAC Setpoints will now load automatically therefore navigating from Control Not Available to Heating or Cooling State
- Default Min = 5 Max = 40 → These values cannot be dynamically adjusted; we will wait for the TH / AC SDKv2 for Native functionality

## 26.07.20 – OS4.6+

Version: Platform Driver V26.07.20 - 1Home Firmware v5.0.1

- Stability and quality update for the 1HOME Crestron Home integration driver.
- Fixed: Multi-instance startup and reboot handling improved for systems using more than one 1HOME driver on the same Crestron Home processor.
- Fixed: Driver recovery after updating Host, Port, or App Token settings. The driver will now rebuild the connection and recover correctly without requiring a manual delete/re-add.
- Fixed: Authentication handling improved when an invalid or expired 1HOME App Token is used. The affected driver instance will now report the correct offline/authentication state until valid settings are restored.
- Fixed: Installer settings persistence improved for upgrades from older driver versions. Visibility settings, HVAC mode visibility, shade advanced/basic mode, shade percentage visibility, and container settings are now retained more reliably per driver instance and device.
- Fixed: Legacy upgraded devices can now be removed and re-added cleanly to receive the latest installer settings structure.
- Fixed: Fan device support improved for supported fan stages. Medium-Low and Medium-High fan actions/events will now remain available when supported by the 1HOME device.
- Fixed: Window covering percentage feedback improved for direct lift and tilt position updates.
- Fixed: Container and shade startup handling improved to reduce unnecessary rebuilds and improve restore behaviour after reboot.
- Improved: Runtime diagnostics reporting for support purposes, with latest driver-instance status and runtime error state reported more accurately.

Note: After upgrading the driver package, a Crestron Home processor reboot is recommended if any devices do not visually refresh immediately after the upgrade

-> **For Installer Settings on Legacy Systems V25.04 and below, a device remove and reboot will be required to finish the upgrade**

| 1Home device type                        |
|------------------------------------------|
| <a href="#">Light: On/Off</a>            |
| <a href="#">Light: Dimming</a>           |
| <a href="#">Light: Color Temperature</a> |
| <a href="#">Light: Color</a>             |
| <a href="#">Thermostat</a>               |
| <a href="#">Socket: On/Off</a>           |
| <a href="#">Window Covering</a>          |
| <a href="#">Door Lock</a>                |
| <a href="#">Push Button</a>              |
| <a href="#">Sensor: Contact</a>          |
| <a href="#">Sensor: Temperature</a>      |
| <a href="#">Sensor: Light</a>            |
| <a href="#">Sensor: Occupancy</a>        |
| <a href="#">Sensor: Humidity</a>         |
| <a href="#">Air Conditioner</a>          |
| <a href="#">KNX Scene</a>                |
| <a href="#">Pulse</a>                    |
| <a href="#">Garage Door</a>              |